









P20 INTERIOR USE ONLY

100-240V 50/60Hz

DRX2; 2-Circuit Track LED 7° Optic 36W



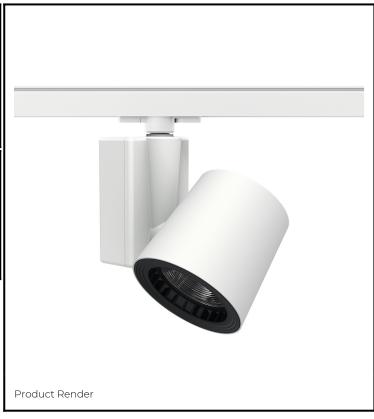

CONSTRUCTION MATERIALS:

A380 Aluminium, Glassfilled Polycarbonate

MOUNTING:

2-Circuit Track

WEIGHT: FINISH:

White RAL9010

MAX AMBIENT TEMPERATURE:

40°C

1.9 kg

CEILING CLEARANCE:

n/a

CEILING CUT-OUT:

n/a

CEILING THICKNESS:

n/a

MOVEMENT TYPE:

Handheld

DIMMING OPTION:

CONTROL

Handheld

DRX2 2700K LED (25W for light source) compact spotlight for 2-Circuit Eutrac with 7° optic. Manufactured from A380 aluminium and glass-filled polycarbonate. Finished in white (RAL 9010). Voltage is 100-240V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/-165° movement through the pan axis and +/- 110° through the tilt axis, at a resolution of less than 1° in either axis. Movement and dimming is controlled using a handheld remote. Recording and recalling of scenes as standard. Product is ETL listed to UL1574 and CSA C22.2#9.0 standards.

PART NO.

DRX2.0037.US

PRODUCT SUMMARY

DRX2 Spotlight; USA; 100-240V 50/60Hz; 2~ Eutrac; 7° Optic; 2700K 90+CRI COB LED 25W; White; Movement & Dimming using Handheld Remote

T +44 (0)20 8404 2400 SALES@RCLIGHTING.COM PAGE 1 OF 2 F +44 (0)20 8286 6626 WWW.RCLIGHTING.COM









100-240V 50/60Hz

DRX2; 2-Circuit Track LED 7° Optic 36W



70		1	
7°		1	LED
1m	0.12m	A	73476 lx
		Λ	
2m	0.24m		18369 lx
		П	
3m	0.37m		8164 lx
4m	0.49m		4592 lx
5m	0.61m		2939 lx

Photometry

Cone Diagram

MOVEMENT TYPE: PAN MOVEMENT RANGE:

±165°

Handheld

TILT MOVEMENT RANGE:

±110°

PAN MOVEMENT RESOLUTION:

<7°

TILT MOVEMENT RESOLUTION: PAN SPEED OF MOVEMENT:

< 10 24°/s

TILT SPEED OF MOVEMENT:

22°/s

VOLTAGE REGION:

100-240V 50/60Hz

IEC PROTECTION CLASS: LIGHT SOURCE WATTAGE:

25W

Class 1

MOVEMENT WATTAGE:

4W

36W

LUMINAIRE CIRCUIT WATTAGE:

LIGHT SOURCE:

COLOUR TEMP:

LED

MIN. DISTANCE FROM TARGET:

MODULE LUMEN OUTPUT: 2200LM

ABSOLUTE LUMEN OUTPUT: 1814LM

GLARE MECHANICAL CUT-OFF: 110

GLARE COMFORT CUT-OFF: 53°

2700K

PART NO.

DRX2.0037.US

PRODUCT SUMMARY

DRX2 Spotlight; USA; 100-240V 50/60Hz; 2~ Eutrac; 7° Optic; 2700K 90+CRI COB LED 25W; White; Movement & Dimming using Handheld Remote

T +44 (0)20 8404 2400 SALES@RCLIGHTING.COM PAGE 2 OF 2 F +44 (0)20 8286 6626 WWW.RCLIGHTING.COM