


## DRX2; 2-Circuit Track LED 7° Optic 36W

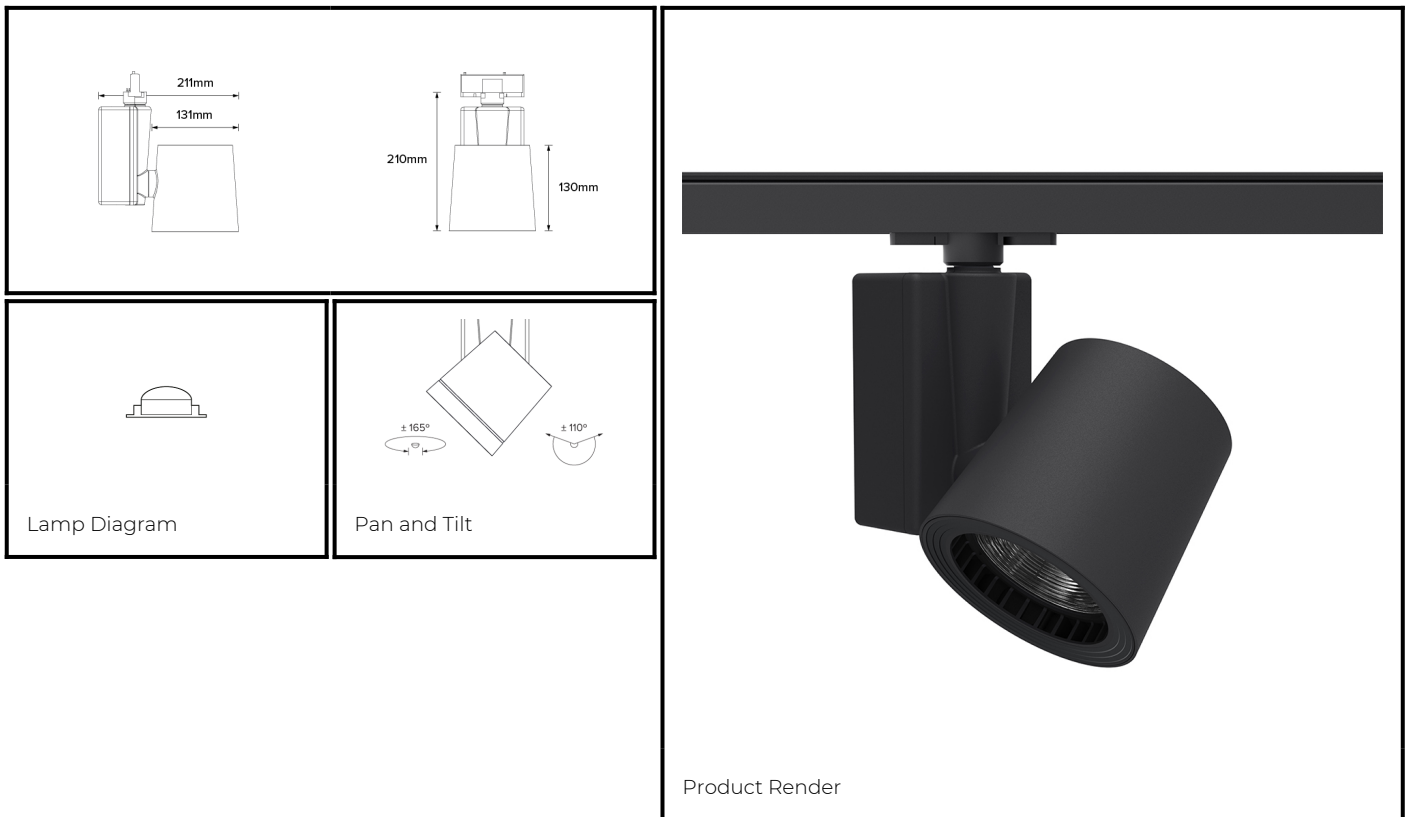

PHYSICAL	<b>CONSTRUCTION MATERIALS:</b>	A380 Aluminium, Glass-filled Polycarbonate
	<b>MOUNTING:</b>	2-Circuit Track
	<b>WEIGHT:</b>	1.9 kg
	<b>FINISH:</b>	Black RAL9005
	<b>MAX AMBIENT TEMPERATURE:</b>	40°C
	<b>CEILING CLEARANCE:</b>	n/a
	<b>CEILING CUT-OUT:</b>	n/a
CONTROL	<b>CEILING THICKNESS:</b>	n/a
	<b>MOVEMENT TYPE:</b>	Handheld
	<b>DIMMING OPTION:</b>	Handheld

**SPECIFICATION** DRX2 2700K LED (25W for light source) compact spotlight for 2-Circuit Eutrac with 7° optic. Manufactured from A380 aluminium and glass-filled polycarbonate. Finished in black (RAL 9005). Voltage is 100-240V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 165° movement through the pan axis and +/- 110° through the tilt axis, at a resolution of less than 1° in either axis. Movement and dimming is controlled using a handheld remote. Recording and recalling of scenes as standard. Product is ETL listed to UL1574 and CSA C22.2#9.0 standards.

PART NO.


**DRX2.0043.US**

### PRODUCT SUMMARY

DRX2 Spotlight; USA; 100-240V 50/60Hz; 2~ Eutrac; 7° Optic; 2700K 90+CRI COB LED 25W; Black; Movement & Dimming using Handheld Remote

# DRX2; 2-Circuit Track

LED 7° Optic 36W

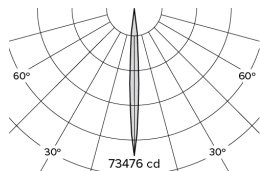

Photometry

		LED
7°		
1m	0.12m	73476 lx
2m	0.24m	18369 lx
3m	0.37m	8164 lx
4m	0.49m	4592 lx
5m	0.61m	2939 lx

Cone Diagram

MOVEMENT	MOVEMENT TYPE:	Handheld
	PAN MOVEMENT RANGE:	±165°
	TILT MOVEMENT RANGE:	±110°
	PAN MOVEMENT RESOLUTION:	<1°
	TILT MOVEMENT RESOLUTION:	<1°
	PAN SPEED OF MOVEMENT:	24°/s
	TILT SPEED OF MOVEMENT:	22°/s

LIGHTING

LIGHT SOURCE:	LED
MIN. DISTANCE FROM TARGET:	
MODULE LUMEN OUTPUT:	2200LM
ABSOLUTE LUMEN OUTPUT:	1814LM
GLARE MECHANICAL CUT-OFF:	11°
GLARE COMFORT CUT-OFF:	53°
COLOUR TEMP:	2700K

ELECTRICAL	<b>VOLTAGE REGION:</b>	100-240V 50/60Hz
	<b>IEC PROTECTION CLASS:</b>	Class I
	<b>LIGHT SOURCE WATTAGE:</b>	25W
	<b>MOVEMENT WATTAGE:</b>	4W
	<b>LUMINAIRE CIRCUIT WATTAGE:</b>	36W

PART NO.

DRX2.0043.US

## PRODUCT SUMMARY

DRX2 Spotlight; USA; 100-240V 50/60Hz; 2~ Eutrac; 7° Optic; 2700K 90+CRI COB LED 25W; Black; Movement & Dimming using Handheld Remote