




# DRX5; Recessed - Standard Trim LED 4° Optic 14W

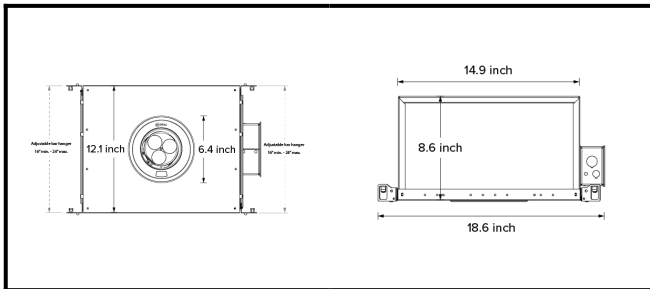

|                 |                                 |  |
|-----------------|---------------------------------|--|
| <b>PHYSICAL</b> | <b>CONSTRUCTION MATERIALS:</b>  | LM24 Aluminium, Glass-filled Polycarbonate, Mild Steel mounting ring |
|                 | <b>MOUNTING:</b>                | Recessed - Standard Trim   |
|                 | <b>WEIGHT:</b>                  | 1.55kg   |
|                 | <b>FINISH:</b>                  | Black RAL9005  |
|                 | <b>MAX AMBIENT TEMPERATURE:</b> | 40°C   |
|                 | <b>CEILING CLEARANCE:</b>       | 9 inches   |
|                 | <b>CEILING CUT-OUT:</b>         | Ø5.71 inches (Ø145mm)  |
|                 | <b>CEILING THICKNESS:</b>       | 0.4 - 2 inches   |

|                |                        |          |
|----------------|------------------------|----------|
| <b>CONTROL</b> | <b>MOVEMENT TYPE:</b>  | Handheld |
|                | <b>DIMMING OPTION:</b> | DMX      |

**SPECIFICATION** DRX5 3000K LED (10W for light source) standard trim recessed luminaire with 4° optic. Manufactured from LM24 aluminium and glass-filled polycarbonate with a mild-steel mounting ring, installed in a mild-steel recessed IC housing with junction box. Finished in black (RAL 9005). Voltage is 100-277V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 185° movement through the pan axis and +35 through the tilt axis, at a resolution of less than 1° in either axis. Movement is controlled using a handheld remote, and dimming is controlled using DMX Recording and recalling of scenes as standard. Product is ETL listed to UL1598 and CSA C22.2#250.0 standards.


PART NO.

**DRX5.0007.US**
**PRODUCT SUMMARY**


DRX5 Spotlight; USA; 100-277V 50/60Hz; Standard Trim Mounting; 4° Optic; 3000K 90+CRI LED 10W; Black; Movement using Handheld Remote; Dimming using DMX Control

# DRX5; Recessed - Standard Trim

LED 4° Optic 14W



Photometry



Cone Diagram

|                 |                                  |          |
|-----------------|----------------------------------|----------|
| <b>MOVEMENT</b> | <b>MOVEMENT TYPE:</b>            | Handheld |
|                 | <b>PAN MOVEMENT RANGE:</b>       | ±185°    |
|                 | <b>TILT MOVEMENT RANGE:</b>      | +35°     |
|                 | <b>PAN MOVEMENT RESOLUTION:</b>  | <1°      |
|                 | <b>TILT MOVEMENT RESOLUTION:</b> | <1°      |
|                 | <b>PAN SPEED OF MOVEMENT:</b>    | 20°/s    |
|                 | <b>TILT SPEED OF MOVEMENT:</b>   | 20°/s    |

|                     |                                   |       |
|---------------------|-----------------------------------|-------|
| <b>LIGHTING</b>     | <b>LIGHT SOURCE:</b>              | LED   |
|                     | <b>MIN. DISTANCE FROM TARGET:</b> | N/A   |
|                     | <b>MODULE LUMEN OUTPUT:</b>       | 594LM |
|                     | <b>ABSOLUTE LUMEN OUTPUT:</b>     | 540LM |
|                     | <b>GLARE MECHANICAL CUT-OFF:</b>  | 26°   |
|                     | <b>GLARE COMFORT CUT-OFF:</b>     | 52°   |
| <b>COLOUR TEMP:</b> | 3000K                             |       |

|                   |                                   |                  |
|-------------------|-----------------------------------|------------------|
| <b>ELECTRICAL</b> | <b>VOLTAGE REGION:</b>            | 100-277V 50/60Hz |
|                   | <b>IEC PROTECTION CLASS:</b>      | Class 2          |
|                   | <b>LIGHT SOURCE WATTAGE:</b>      | 10W              |
|                   | <b>MOVEMENT WATTAGE:</b>          | 3W               |
|                   | <b>LUMINAIRE CIRCUIT WATTAGE:</b> | 14W              |

PART NO.

**DRX5.0007.US**

**PRODUCT SUMMARY**

DRX5 Spotlight; USA; 100-277V 50/60Hz; Standard Trim Mounting; 4° Optic; 3000K 90+CRI LED 10W; Black; Movement using Handheld Remote; Dimming using DMX Control