


DRX5; Recessed - Standard Trim LED 4° Optic 14W

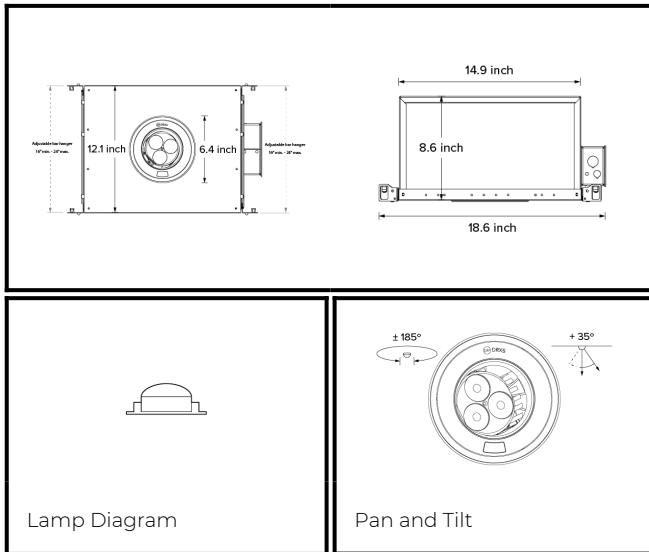

Product Render

| | | |
|----------|---------------------------------|--|
| PHYSICAL | CONSTRUCTION MATERIALS: | LM24 Aluminium, Glass-filled Polycarbonate, Mild Steel mounting ring |
| | MOUNTING: | Recessed - Standard Trim |
| | WEIGHT: | 1.55kg |
| | FINISH: | Black RAL9005 |
| | MAX AMBIENT TEMPERATURE: | 40°C |
| | CEILING CLEARANCE: | 9 inches |
| CONTROL | CEILING CUT-OUT: | Ø5.71 inches (Ø145mm) |
| | CEILING THICKNESS: | 0.4 - 2 inches |
| | MOVEMENT TYPE: | Handheld |
| | DIMMING OPTION: | 1-10V |

SPECIFICATION DRX5 3000K LED (10W for light source) standard trim recessed luminaire with 4° optic. Manufactured from LM24 aluminium and glass-filled polycarbonate with a mild-steel mounting ring, installed in a mild-steel recessed IC housing with junction box. Finished in black (RAL 9005). Voltage is 100-277V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 185° movement through the pan axis and +35 through the tilt axis, at a resolution of less than 1° in either axis. Movement is controlled using a handheld remote, and dimming is controlled using external 1-10V dimming. Recording and recalling of scenes as standard. Product is ETL listed to UL1598 and CSA C22.2#250.0 standards.


PART NO.

DRX5.0010.US


PRODUCT SUMMARY

DRX5 Spotlight; USA; 100-277V 50/60Hz; Standard Trim Mounting; 4° Optic; 3000K 90+CRI LED 10W; Black; Movement using Handheld Remote; Dimming Using External (1-10V)

DRX5; Recessed - Standard Trim LED 4° Optic 14W

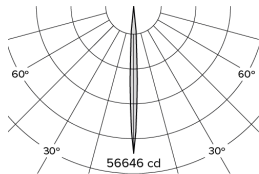

Photometry



Cone Diagram

| | | |
|----------|---------------------------|----------|
| MOVEMENT | MOVEMENT TYPE: | Handheld |
| | PAN MOVEMENT RANGE: | ±185° |
| | TILT MOVEMENT RANGE: | +35° |
| | PAN MOVEMENT RESOLUTION: | <1° |
| | TILT MOVEMENT RESOLUTION: | <1° |
| | PAN SPEED OF MOVEMENT: | 20°/s |
| | TILT SPEED OF MOVEMENT: | 20°/s |

| | | |
|----------|----------------------------|-------|
| LIGHTING | LIGHT SOURCE: | LED |
| | MIN. DISTANCE FROM TARGET: | N/A |
| | MODULE LUMEN OUTPUT: | 594LM |
| | ABSOLUTE LUMEN OUTPUT: | 540LM |
| | GLARE MECHANICAL CUT-OFF: | 26° |
| | GLARE COMFORT CUT-OFF: | 52° |
| | COLOUR TEMP: | 3000K |

| | | |
|------------|----------------------------|------------------|
| ELECTRICAL | VOLTAGE REGION: | 100-277V 50/60Hz |
| | IEC PROTECTION CLASS: | Class 2 |
| | LIGHT SOURCE WATTAGE: | 10W |
| | MOVEMENT WATTAGE: | 3W |
| | LUMINAIRE CIRCUIT WATTAGE: | 14W |

PART NO.

DRX5.0010.US

PRODUCT SUMMARY

DRX5 Spotlight; USA; 100-277V 50/60Hz; Standard Trim Mounting; 4° Optic; 3000K 90+CRI LED 10W; Black; Movement using Handheld Remote; Dimming Using External (1-10V)