


## DRX1; 2-Circuit Track LED 4° Optic 15W

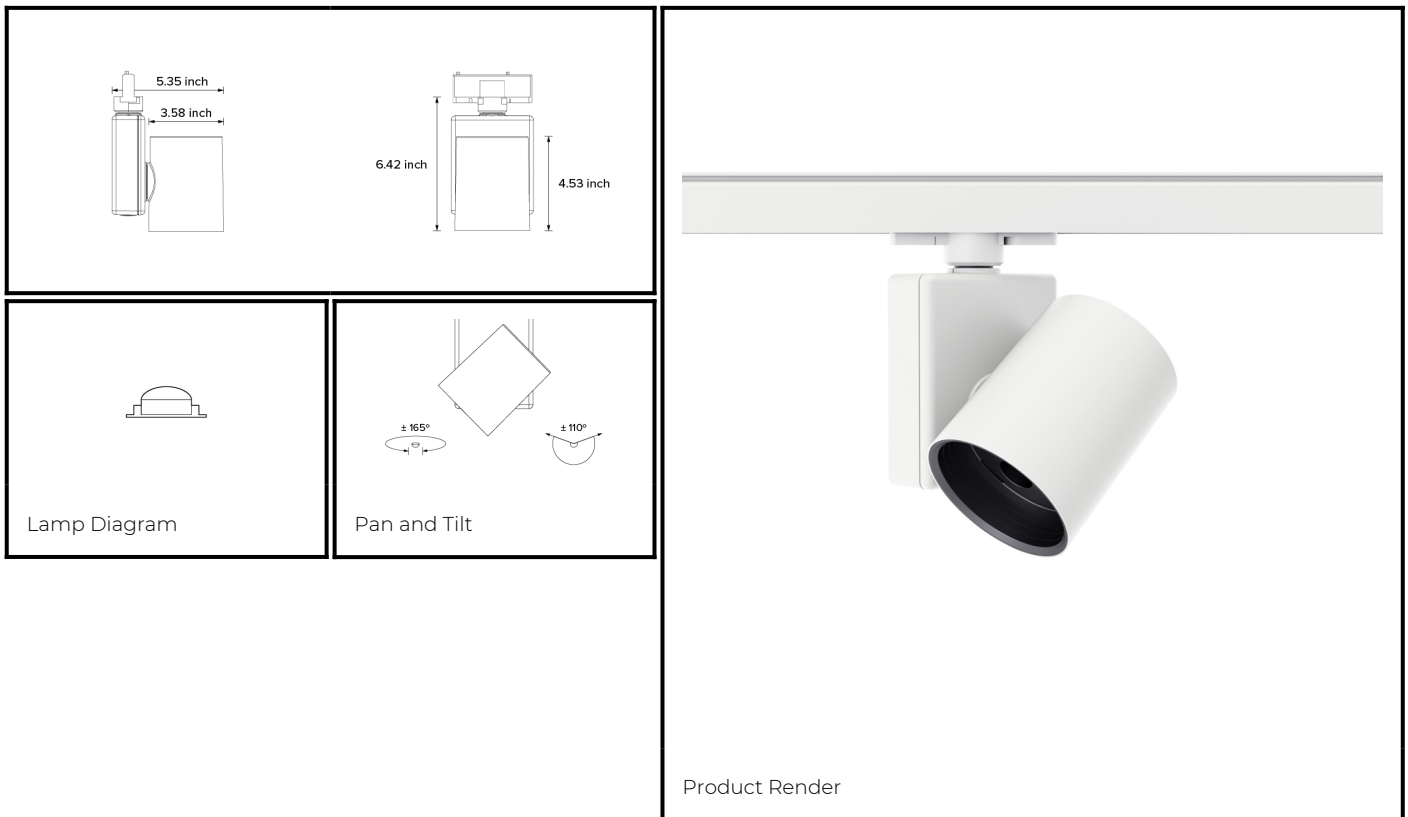

|          |                                 |  |
|----------|---------------------------------|--|
| PHYSICAL | <b>CONSTRUCTION MATERIALS:</b>  | A380 Aluminium, Glass-filled Polycarbonate |
|          | <b>MOUNTING:</b>                | 2-Circuit Track                            |
|          | <b>WEIGHT:</b>                  | 1.2 kg                                     |
|          | <b>FINISH:</b>                  | White RAL9010                              |
|          | <b>MAX AMBIENT TEMPERATURE:</b> | 40°C                                       |
|          | <b>CEILING CLEARANCE:</b>       | n/a  |
|          | <b>CEILING CUT-OUT:</b>         | n/a  |
| CONTROL  | <b>CEILING THICKNESS:</b>       | n/a  |
|          | <b>MOVEMENT TYPE:</b>           | Handheld                                   |
|          | <b>DIMMING OPTION:</b>          | DALI                                       |

**SPECIFICATION** DRX1 4000K LED (10W for light source) compact spotlight for 2-Circuit Eutrac with 4° optic. Manufactured from A380 aluminium and glass-filled polycarbonate. Finished in white (RAL 9010). Voltage is 100-240V 50/60HZ. Luminaire has high-performance colour rendering of 80+ CRI. Luminaire can be rotated, with +/- 165° movement through the pan axis and +/- 110° through the tilt axis, at a resolution of less than 1° in either axis. Movement is controlled using a handheld remote, and dimming is controlled using external DALI dimming. Recording and recalling of scenes as standard. Product is ETL listed to UL1574 and CSA C22.2#9.0 standards.

PART NO.


**DRX1.0054.US**

### PRODUCT SUMMARY


DRX1 Spotlight; USA; 100-240V 50/60Hz; 2~ Eutrac; 4° Optic; 4000K 80+CRI LED 10W; White; Movement using Handheld Remote; Dimming Using External DALI Control

# DRX1; 2-Circuit Track

LED 4° Optic 15W

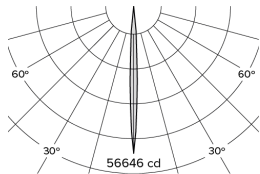

Photometry



Cone Diagram

|          |                           |          |
|----------|---------------------------|----------|
| MOVEMENT | MOVEMENT TYPE:            | Handheld |
|          | PAN MOVEMENT RANGE:       | ±165°    |
|          | TILT MOVEMENT RANGE:      | ±110°    |
|          | PAN MOVEMENT RESOLUTION:  | <1°      |
|          | TILT MOVEMENT RESOLUTION: | <1°      |
|          | PAN SPEED OF MOVEMENT:    | 24°/s    |
|          | TILT SPEED OF MOVEMENT:   | 22°/s    |

|          |                            |       |
|----------|----------------------------|-------|
| LIGHTING | LIGHT SOURCE:              | LED   |
|          | MIN. DISTANCE FROM TARGET: |       |
|          | MODULE LUMEN OUTPUT:       | 594LM |
|          | ABSOLUTE LUMEN OUTPUT:     | 540LM |
|          | GLARE MECHANICAL CUT-OFF:  | 25    |
|          | GLARE COMFORT CUT-OFF:     | 50    |
|          | COLOUR TEMP:               | 4000K |

|            |                            |                  |
|------------|----------------------------|------------------|
| ELECTRICAL | VOLTAGE REGION:            | 100-240V 50/60Hz |
|            | IEC PROTECTION CLASS:      | Class 2          |
|            | LIGHT SOURCE WATTAGE:      | 10W              |
|            | MOVEMENT WATTAGE:          | 4W               |
|            | LUMINAIRE CIRCUIT WATTAGE: | 15W              |

PART NO.

DRX1.0054.US

## PRODUCT SUMMARY

DRX1 Spotlight; USA; 100-240V 50/60Hz; 2~ Eutrac; 4° Optic; 4000K 80+CRI LED 10W; White; Movement using Handheld Remote; Dimming Using External DALI Control