


;

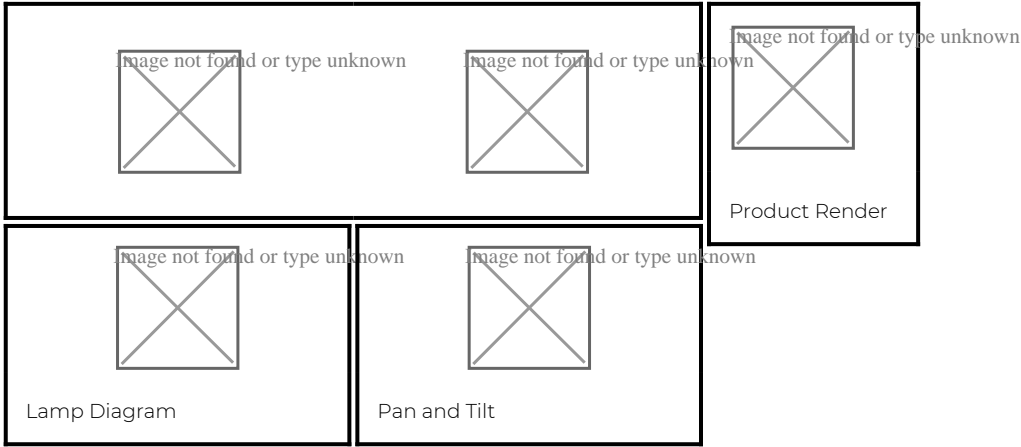

PHYSICAL

- WEIGHT:
- FINISH:
- MAX AMBIENT TEMPERATURE:
- CEILING CLEARANCE:
- CEILING CUT-OUT:
- CEILING THICKNESS:

CONTROL

- MOVEMENT TYPE:
- DIMMING OPTION:


SPECIFICATION

PART NO.

PRODUCT SUMMARY

DAT-

Photometry



Cone Diagram

MOVEMENT TYPE:
PAN MOVEMENT RANGE:
TILT MOVEMENT RANGE:
PAN MOVEMENT RESOLUTION:
TILT MOVEMENT RESOLUTION:
PAN SPEED OF MOVEMENT:
TILT SPEED OF MOVEMENT:

ELECTRICAL

VOLTAGE REGION:
IEC PROTECTION CLASS:
LIGHT SOURCE WATTAGE:
MOVEMENT WATTAGE:
LUMINAIRE CIRCUIT WATTAGE:

LIGHTING

LIGHT SOURCE:

MIN. DISTANCE FROM TARGET:

MODULE LUMEN OUTPUT:

ABSOLUTE LUMEN OUTPUT:

GLARE MECHANICAL CUT-OFF:

GLARE COMFORT CUT-OFF:

COLOUR TEMP:

PART NO.

PRODUCT SUMMARY

DAT-