


## DRX5; Recessed - Standard Trim LED 10° Optic 20W

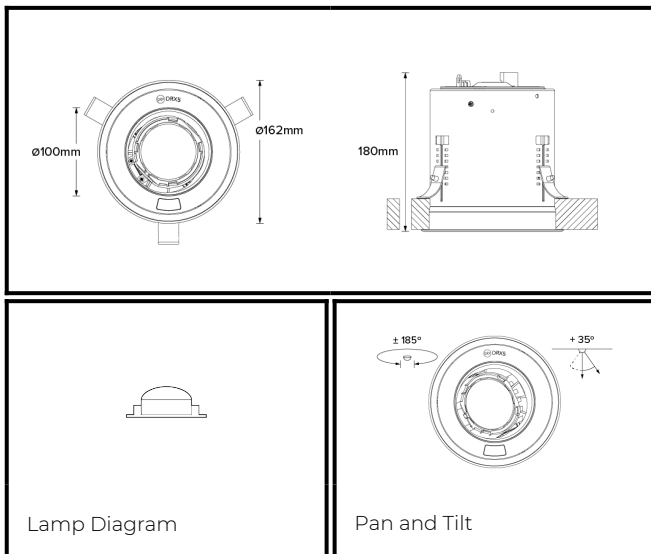

Product Render

<b>PHYSICAL</b>	<b>CONSTRUCTION MATERIALS:</b>	LM24 Aluminium, Glass-filled Polycarbonate, Mild Steel mounting ring
	<b>MOUNTING:</b>	Recessed - Standard Trim
	<b>WEIGHT:</b>	1.55kg
	<b>FINISH:</b>	White RAL9010
	<b>MAX AMBIENT TEMPERATURE:</b>	40°C
<b>CONTROL</b>	<b>CEILING CLEARANCE:</b>	200mm
	<b>CEILING CUT-OUT:</b>	145mm
	<b>CEILING THICKNESS:</b>	10-55mm
	<b>MOVEMENT TYPE:</b>	Handheld
	<b>DIMMING OPTION:</b>	1-10V

**SPECIFICATION** DRX5 3000K LED (17W for light source) standard trim recessed luminaire with 10° optic. Manufactured from LM24 aluminium and glass-filled polycarbonate, with a mild-steel mounting ring. Finished in white (RAL 9010). Voltage is 100-277V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 185° movement through the pan axis and +35 through the tilt axis, at a resolution of less than 1° in either axis. Movement is controlled using a handheld remote, and dimming is controlled using external 1-10V dimming. Recording and recalling of scenes as standard.

PART NO.


**DRX5.0015**

### PRODUCT SUMMARY


DRX5 Spotlight; 100-277V 50/60Hz; Standard Trim Mounting; 10° Optic; 3000K 90+CRI LED 17W; White; Movement using Handheld Remote; Dimming Using External (1-10V)

# DRX5; Recessed - Standard Trim

LED 10° Optic 20W

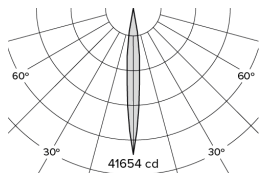

Photometry

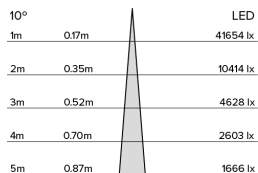

Cone Diagram

MOVEMENT	MOVEMENT TYPE:	Handheld
	PAN MOVEMENT RANGE:	±185°
	TILT MOVEMENT RANGE:	+35°
	PAN MOVEMENT RESOLUTION:	<1°
	TILT MOVEMENT RESOLUTION:	<1°
	PAN SPEED OF MOVEMENT:	20°/s
	TILT SPEED OF MOVEMENT:	20°/s

LIGHTING	LIGHT SOURCE:	LED
	MIN. DISTANCE FROM TARGET:	N/A
	MODULE LUMEN OUTPUT:	1573LM
	ABSOLUTE LUMEN OUTPUT:	1474LM
	GLARE MECHANICAL CUT-OFF:	17°
	GLARE COMFORT CUT-OFF:	52°
	COLOUR TEMP:	3000K

ELECTRICAL	VOLTAGE REGION:	100-277V 50/60Hz
	IEC PROTECTION CLASS:	Class 2
	LIGHT SOURCE WATTAGE:	17W
	MOVEMENT WATTAGE:	3W
	LUMINAIRE CIRCUIT WATTAGE:	20W

PART NO.

DRX5.0015

## PRODUCT SUMMARY

DRX5 Spotlight; 100-277V 50/60Hz; Standard Trim Mounting; 10° Optic; 3000K 90+CRI LED 17W; White; Movement using Handheld Remote; Dimming Using External (1-10V)