


# DRX5; Recessed - Standard Trim LED 10° Optic 20W

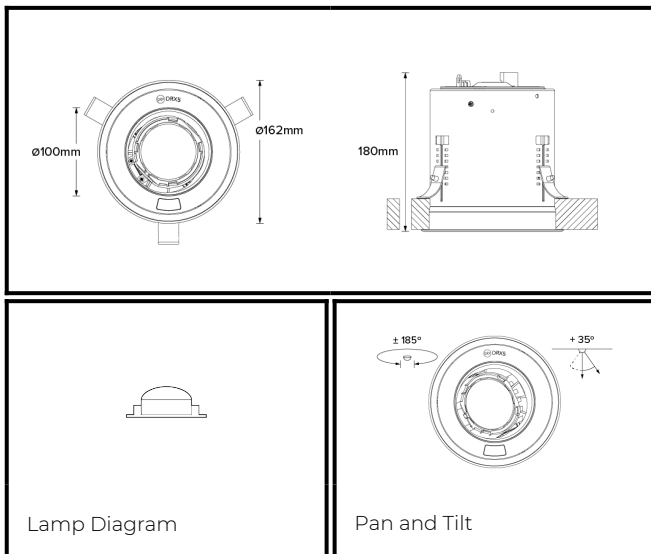

Product Render

<b>PHYSICAL</b>	<b>CONSTRUCTION MATERIALS:</b>	LM24 Aluminium, Glass-filled Polycarbonate, Mild Steel mounting ring
	<b>MOUNTING:</b>	Recessed - Standard Trim
	<b>WEIGHT:</b>	1.55kg
	<b>FINISH:</b>	Black RAL9005
	<b>MAX AMBIENT TEMPERATURE:</b>	40°C
<b>CONTROL</b>	<b>CEILING CLEARANCE:</b>	200mm
	<b>CEILING CUT-OUT:</b>	145mm
	<b>CEILING THICKNESS:</b>	10-55mm
	<b>MOVEMENT TYPE:</b>	Handheld
	<b>DIMMING OPTION:</b>	DMX

**SPECIFICATION** DRX5 3000K LED (17W for light source) standard trim recessed luminaire with 10° optic. Manufactured from LM24 aluminium and glass-filled polycarbonate, with a mild-steel mounting ring. Finished in black (RAL 9005). Voltage is 100-277V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 185° movement through the pan axis and +35 through the tilt axis, at a resolution of less than 1° in either axis. Movement is controlled using a handheld remote, and dimming is controlled using DMX Recording and recalling of scenes as standard.


PART NO.

**DRX5.0017**


## PRODUCT SUMMARY

DRX5 Spotlight; 100-277V 50/60Hz; Standard Trim Mounting; 10° Optic; 3000K 90+CRI LED 17W; Black; Movement using Handheld Remote; Dimming using DMX Control

# DRX5; Recessed - Standard Trim LED 10° Optic 20W

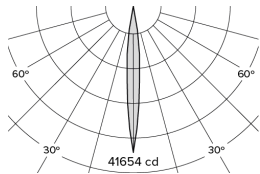

Photometry

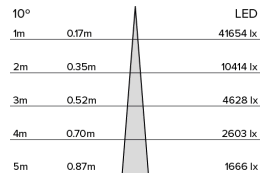

Cone Diagram

<b>MOVEMENT</b>	<b>MOVEMENT TYPE:</b>	Handheld	<b>LIGHTING</b>	<b>LIGHT SOURCE:</b>	LED
	<b>PAN MOVEMENT RANGE:</b>	±185°		<b>MIN. DISTANCE FROM TARGET:</b>	N/A
	<b>TILT MOVEMENT RANGE:</b>	+35°		<b>MODULE LUMEN OUTPUT:</b>	1573LM
	<b>PAN MOVEMENT RESOLUTION:</b>	<1°		<b>ABSOLUTE LUMEN OUTPUT:</b>	1474LM
	<b>TILT MOVEMENT RESOLUTION:</b>	<1°		<b>GLARE MECHANICAL CUT-OFF:</b>	17°
	<b>PAN SPEED OF MOVEMENT:</b>	20°/s		<b>GLARE COMFORT CUT-OFF:</b>	52°
	<b>TILT SPEED OF MOVEMENT:</b>	20°/s		<b>COLOUR TEMP:</b>	3000K
<b>ELECTRICAL</b>	<b>VOLTAGE REGION:</b>	100-277V 50/60Hz			
	<b>IEC PROTECTION CLASS:</b>	Class 2			
	<b>LIGHT SOURCE WATTAGE:</b>	17W			
	<b>MOVEMENT WATTAGE:</b>	3W			
	<b>LUMINAIRE CIRCUIT WATTAGE:</b>	20W			

PART NO. **DRX5.0017**

## PRODUCT SUMMARY

DRX5 Spotlight; 100-277V 50/60Hz; Standard Trim Mounting; 10° Optic; 3000K 90+CRI LED 17W; Black; Movement using Handheld Remote; Dimming using DMX Control