


DRX5; Recessed - Standard Trim LED 22° Optic 20W

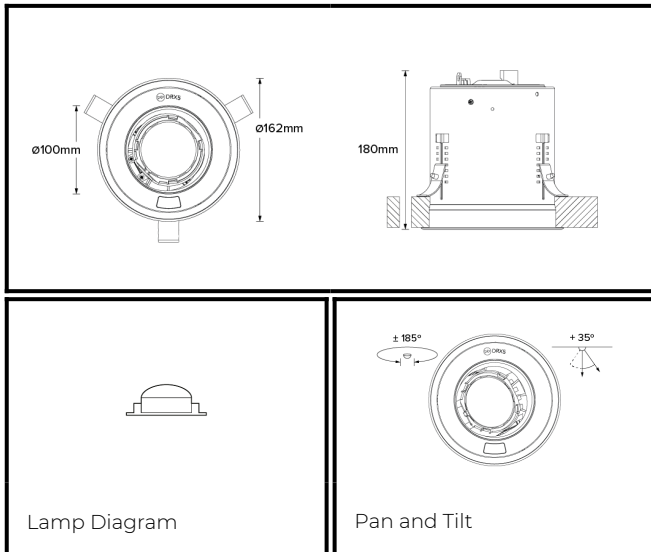

Product Render

| | | |
|-----------------|---------------------------------|--|
| PHYSICAL | CONSTRUCTION MATERIALS: | LM24 Aluminium, Glass-filled Polycarbonate, Mild Steel mounting ring |
| | MOUNTING: | Recessed - Standard Trim |
| | WEIGHT: | 1.55kg |
| | FINISH: | White RAL9010 |
| | MAX AMBIENT TEMPERATURE: | 40°C |
| | CEILING CLEARANCE: | 200mm |
| | CEILING CUT-OUT: | 145mm |
| CONTROL | CEILING THICKNESS: | 10-55mm |
| | MOVEMENT TYPE: | Handheld |
| | DIMMING OPTION: | Handheld |

SPECIFICATION DRX5 3000K LED (17W for light source) standard trim recessed luminaire with 22° optic. Manufactured from LM24 aluminium and glass-filled polycarbonate, with a mild-steel mounting ring. Finished in white (RAL 9010). Voltage is 100-277V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 185° movement through the pan axis and +35 through the tilt axis, at a resolution of less than 1° in either axis. Movement and dimming is controlled using a handheld remote. Recording and recalling of scenes as standard.


PART NO.

DRX5.0021


PRODUCT SUMMARY

DRX5 Spotlight; 100-277V 50/60Hz; Standard Trim Mounting; 22° Optic; 3000K 90+CRI LED 17W; White; Movement & Dimming using Handheld Remote

DRX5; Recessed - Standard Trim LED 22° Optic 20W

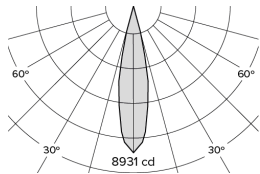

Photometry

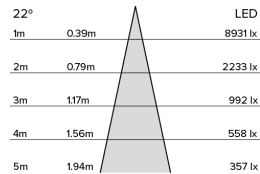

Cone Diagram

| | | | | | |
|------------|---------------------------|----------------------------|----------|----------------------------|--------|
| MOVEMENT | MOVEMENT TYPE: | Handheld | LIGHTING | LIGHT SOURCE: | LED |
| | PAN MOVEMENT RANGE: | +/-185° | | MIN. DISTANCE FROM TARGET: | N/A |
| | TILT MOVEMENT RANGE: | +35° | | MODULE LUMEN OUTPUT: | 1570LM |
| | PAN MOVEMENT RESOLUTION: | <1° | | ABSOLUTE LUMEN OUTPUT: | 1390LM |
| | TILT MOVEMENT RESOLUTION: | <1° | | GLARE MECHANICAL CUT-OFF: | 17° |
| | PAN SPEED OF MOVEMENT: | 20°/s | | GLARE COMFORT CUT-OFF: | 52° |
| ELECTRICAL | TILT SPEED OF MOVEMENT: | 20°/s | | COLOUR TEMP: | 3000K |
| | VOLTAGE REGION: | 100-277V 50/60Hz | | | |
| | IEC PROTECTION CLASS: | Class II | | | |
| | LIGHT SOURCE WATTAGE: | 17W | | | |
| | | MOVEMENT WATTAGE: | | | |
| | | 3W | | | |
| | | LUMINAIRE CIRCUIT WATTAGE: | | | |
| | | 20W | | | |

PART NO. **DRX5.0021**

PRODUCT SUMMARY DRX5 Spotlight; 100-277V 50/60Hz; Standard Trim Mounting; 22° Optic; 3000K 90+CRI LED 17W; White; Movement & Dimming using Handheld Remote