




DRX5; Recessed - Standard Trim LED 22° Optic 20W



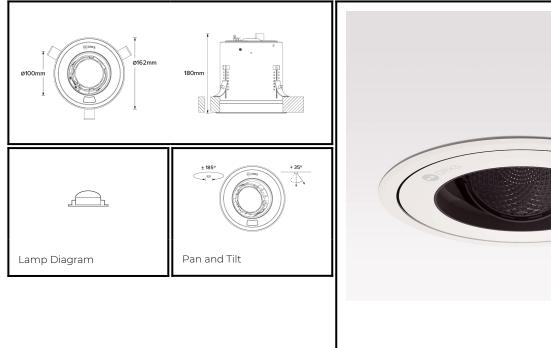

| PHYSICAL | CONSTRUCTION MATERIALS: | LM24 Aluminium, Glass- filled Polycarbonate, Mild Steel mounting ring Recessed - Standard Trim | PECIFICATION | DRX5 3000K LED (17W for light source) standard trim recessed luminaire with 22° optic. Manufactured from LM24 aluminium and glass-filled polycarbonate, with a mild-steel mounting ring. Finished in white (RAL 9010). Voltage is 100-277V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 185° movement through the |
|----------|--------------------------|--|--------------|---|
| | WEIGHT: | 1.55kg | S | pan axis and +35 through the tilt axis, at a resolution of less than |
| | FINISH: | White RAL9010 | | 1° in either axis. Movement is controlled using a handheld |
| | MAX AMBIENT TEMPERATURE: | 40°C | | remote, and dimming is controlled using DMX Recording and recalling of scenes as standard. |
| | CEILING CLEARANCE: | 200mm | | |
| | CEILING CUT-OUT: | 145mm | | |
| | CEILING THICKNESS: | 10-55mm | | |
| оL | MOVEMENT TYPE: | Handheld | | |
| CONTRO | DIMMING OPTION: | DMX | | |
| | | | | PART NO. DRX5.0022 |


PRODUCT SUMMARY


DRX5 Spotlight; 100-277V 50/60Hz; Standard Trim Mounting; 22° Optic; 3000K 90+CRI LED 17W; White; Movement using Handheld Remote; Dimming using DMX Control





DRX5; Recessed - Standard Trim LED 22° Optic 20W





Photometry

Cone Diagram

| F | MOVEMENT TYPE: | Handheld |
|--------|---------------------------|----------|
| VEMEN | PAN MOVEMENT RANGE: | ±185° |
| N N | TILT MOVEMENT RANGE: | +35° |
| ž | PAN MOVEMENT RESOLUTION: | <]° |
| | TILT MOVEMENT RESOLUTION: | <]° |
| | PAN SPEED OF MOVEMENT: | 20°/s |
| | TILT SPEED OF MOVEMENT: | 20°/s |
| | | |

| RICAL | VOLTAGE REGION: | 100-277V 50/60Hz |
|-------|----------------------------|------------------|
| | IEC PROTECTION CLASS: | Class 2 |
| ECT | LIGHT SOURCE WATTAGE: | 17W |
| Ξ | MOVEMENT WATTAGE: | 3W |
| | LUMINAIRE CIRCUIT WATTAGE: | 20W |

| U LIGHT SOURCE: | LED |
|----------------------------|--------|
| MIN. DISTANCE FROM TARGET: | N/A |
| MODULE LUMEN OUTPUT: | 1573LM |
| ABSOLUTE LUMEN OUTPUT: | 1399LM |
| GLARE MECHANICAL CUT-OFF: | 17° |
| GLARE COMFORT CUT-OFF: | 52° |
| COLOUR TEMP: | 3000K |

PART NO.

DRX5.0022

PRODUCT SUMMARY

DRX5 Spotlight; 100-277V 50/60Hz; Standard Trim Mounting; 22° Optic; 3000K 90+CRI LED 17W; White; Movement using Handheld Remote; Dimming using DMX Control

PAGE 2 OF 2

T +44 (0)20 8404 2400 SALES@RCLIGHTING.COM F +44 (0)20 8286 6626 WWW.RCLIGHTING.COM