


DRX5; Recessed - Standard Trim LED 22° Optic 20W

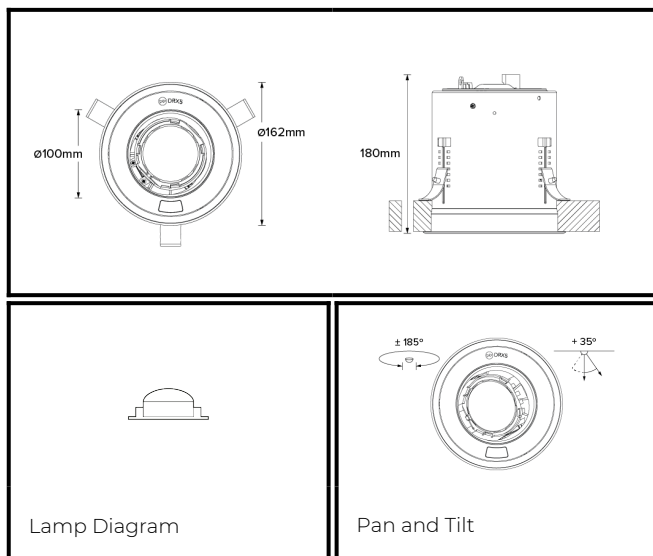

Product Render

PHYSICAL	CONSTRUCTION MATERIALS:	LM24 Aluminium, Glass-filled Polycarbonate, Mild Steel mounting ring
	MOUNTING:	Recessed - Standard Trim
	WEIGHT:	1.55kg
	FINISH:	White RAL9010
	MAX AMBIENT TEMPERATURE:	40°C
	CEILING CLEARANCE:	200mm
	CEILING CUT-OUT:	145mm
CONTROL	CEILING THICKNESS:	10-55mm
	MOVEMENT TYPE:	DMX
	DIMMING OPTION:	DMX

SPECIFICATION DRX5 3000K LED (17W for light source) standard trim recessed luminaire with 22° optic. Manufactured from LM24 aluminium and glass-filled polycarbonate, with a mild-steel mounting ring. Finished in white (RAL 9010). Voltage is 100-277V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 185° movement through the pan axis and +35 through the tilt axis, at a resolution of less than 1° in either axis. Movement and dimming is controlled by DMX. Recording and recalling of scenes as standard.


PART NO.

DRX5.0023


PRODUCT SUMMARY

DRX5 Spotlight; 100-277V 50/60Hz; Standard Trim Mounting; 22° Optic; 3000K 90+CRI LED 17W; White; Movement & Dimming using DMX Control only

DRX5; Recessed - Standard Trim LED 22° Optic 20W



Photometry



Cone Diagram

MOVEMENT	MOVEMENT TYPE:	DMX	LIGHTING	LIGHT SOURCE:	LED
	PAN MOVEMENT RANGE:	±185°		MIN. DISTANCE FROM TARGET:	N/A
	TILT MOVEMENT RANGE:	+35°		MODULE LUMEN OUTPUT:	1573LM
	PAN MOVEMENT RESOLUTION:	<1°		ABSOLUTE LUMEN OUTPUT:	1399LM
	TILT MOVEMENT RESOLUTION:	<1°		GLARE MECHANICAL CUT-OFF:	17°
	PAN SPEED OF MOVEMENT:	20°/s		GLARE COMFORT CUT-OFF:	52°
ELECTRICAL	TILT SPEED OF MOVEMENT:	20°/s		COLOUR TEMP:	3000K
	VOLTAGE REGION:	100-277V 50/60Hz			
	IEC PROTECTION CLASS:	Class 2			
	LIGHT SOURCE WATTAGE:	17W			
		MOVEMENT WATTAGE:			
		3W			
		LUMINAIRE CIRCUIT WATTAGE:			
		20W			

PART NO. **DRX5.0023**

PRODUCT SUMMARY

DRX5 Spotlight; 100-277V 50/60Hz; Standard Trim Mounting; 22° Optic; 3000K 90+CRI LED 17W; White; Movement & Dimming using DMX Control only