


;

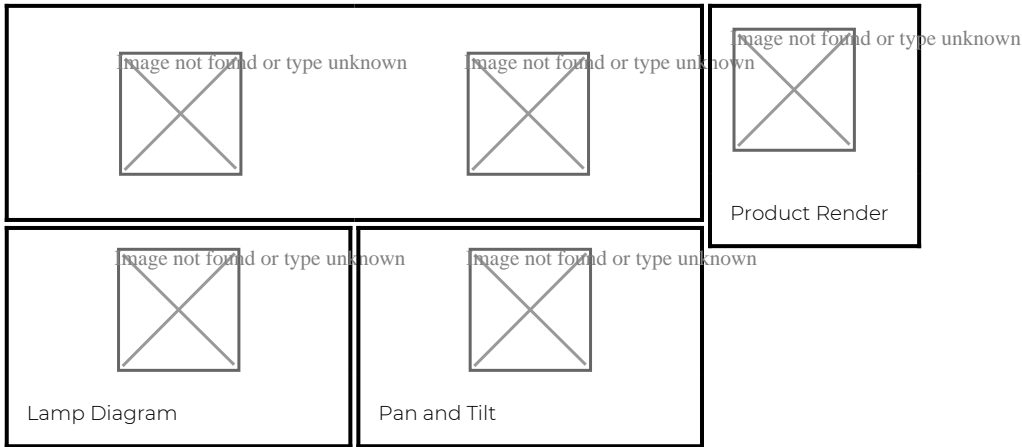

**PHYSICAL**

- WEIGHT:
- FINISH:
- MAX AMBIENT TEMPERATURE:
- CEILING CLEARANCE:
- CEILING CUT-OUT:
- CEILING THICKNESS:

**SPECIFICATION**

**CONTROL**

- MOVEMENT TYPE:
- DIMMING OPTION:

PART NO.

**PRODUCT SUMMARY**

**DAT-**


;

Image not found or type unknown



Photometry

Image not found or type unknown



Cone Diagram

- MOVEMENT**
- MOVEMENT TYPE:
  - PAN MOVEMENT RANGE:
  - TILT MOVEMENT RANGE:
  - PAN MOVEMENT RESOLUTION:
  - TILT MOVEMENT RESOLUTION:
  - PAN SPEED OF MOVEMENT:
  - TILT SPEED OF MOVEMENT:

- ELECTRICAL**
- VOLTAGE REGION:
  - IEC PROTECTION CLASS:
  - LIGHT SOURCE WATTAGE:
  - MOVEMENT WATTAGE:
  - LUMINAIRE CIRCUIT WATTAGE:

- LIGHTING**
- LIGHT SOURCE:
  - MIN. DISTANCE FROM TARGET:
  - MODULE LUMEN OUTPUT:
  - ABSOLUTE LUMEN OUTPUT:
  - GLARE MECHANICAL CUT-OFF:
  - GLARE COMFORT CUT-OFF:
  - COLOUR TEMP:

PART NO. 

PRODUCT SUMMARY

DAT-