


;

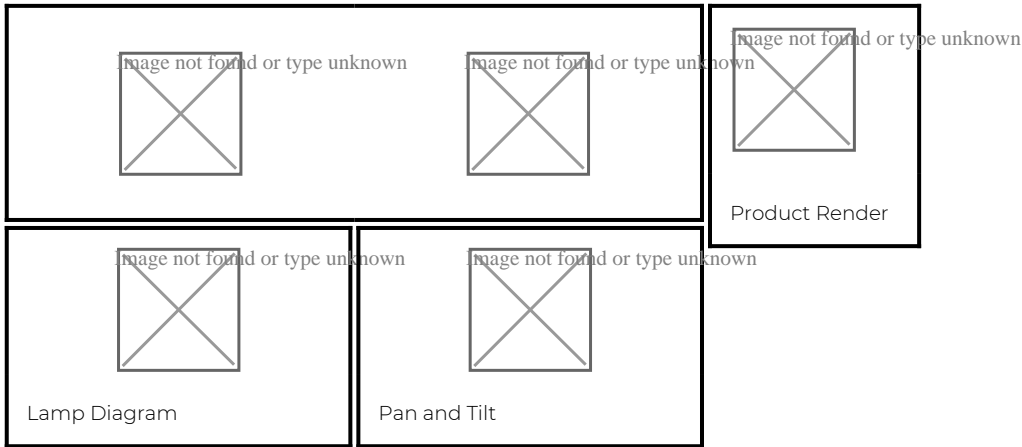

PHYSICAL

- WEIGHT:
- FINISH:
- MAX AMBIENT TEMPERATURE:
- CEILING CLEARANCE:
- CEILING CUT-OUT:
- CEILING THICKNESS:

SPECIFICATION

CONTROL

- MOVEMENT TYPE:
- DIMMING OPTION:


PART NO.

PRODUCT SUMMARY

DAT-


;

Image not found or type unknown



Photometry

Image not found or type unknown



Cone Diagram

- MOVEMENT**
- MOVEMENT TYPE:
 - PAN MOVEMENT RANGE:
 - TILT MOVEMENT RANGE:
 - PAN MOVEMENT RESOLUTION:
 - TILT MOVEMENT RESOLUTION:
 - PAN SPEED OF MOVEMENT:
 - TILT SPEED OF MOVEMENT:

- ELECTRICAL**
- VOLTAGE REGION:
 - IEC PROTECTION CLASS:
 - LIGHT SOURCE WATTAGE:
 - MOVEMENT WATTAGE:
 - LUMINAIRE CIRCUIT WATTAGE:

- LIGHTING**
- LIGHT SOURCE:
 - MIN. DISTANCE FROM TARGET:
 - MODULE LUMEN OUTPUT:
 - ABSOLUTE LUMEN OUTPUT:
 - GLARE MECHANICAL CUT-OFF:
 - GLARE COMFORT CUT-OFF:
 - COLOUR TEMP:

PART NO. 

PRODUCT SUMMARY

DAT-