




DRX1; 1-Circuit Track LED 4° Optic 15W

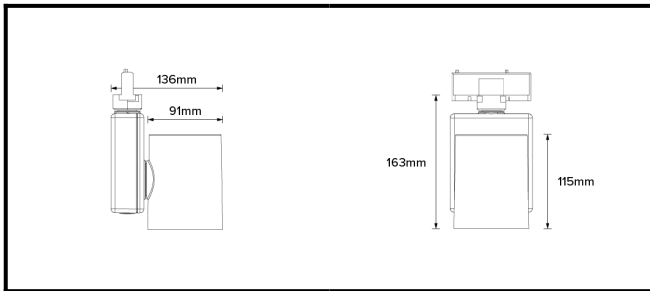

PHYSICAL	MOUNTING:	1-Circuit Track
	WEIGHT:	1.2 kg
	FINISH:	Black RAL9005
	MAX AMBIENT TEMPERATURE:	40°C
	CEILING CLEARANCE:	N/A
	CEILING CUT-OUT:	N/A
	CEILING THICKNESS:	N/A

CONTROL	MOVEMENT TYPE:	Handheld Remote
	DIMMING OPTION:	DMX


SPECIFICATION DRX1 3000K LED (10W for light source) compact spotlight for 1-Circuit Eutrac with 4° optic. Manufactured from A380 aluminium and glass-filled polycarbonate. Finished in black (RAL 9005). Voltage is 100-240V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 165° movement through the pan axis and +/- 110° through the tilt axis, at a resolution of less than 1° in either axis. Movement is controlled using a handheld remote, and dimming is controlled using DMX. Recording and recalling of scenes as standard.

PART NO.

DRX1.0017
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 3000K 90+CRI LED 10W; Black; Movement using Handheld Remote; Dimming using DMX Control

DRX1; 1-Circuit Track LED 4° Optic 15W



Photometry

15W 4°		LED
1m	0.07m	56646 lx
2m	0.14m	14161 lx
3m	0.21m	6294 lx
4m	0.28m	3540 lx
5m	0.35m	2266 lx

Cone Diagram

MOVEMENT	MOVEMENT TYPE:	Handheld Remote
	PAN MOVEMENT RANGE:	±165°
	TILT MOVEMENT RANGE:	±110°
	PAN MOVEMENT RESOLUTION:	<1°
	TILT MOVEMENT RESOLUTION:	<1°
	PAN SPEED OF MOVEMENT:	24°/s
	TILT SPEED OF MOVEMENT:	22°/s

LIGHTING	LIGHT SOURCE:	LED
	MIN. DISTANCE FROM TARGET:	N/A
	MODULE LUMEN OUTPUT:	594lm
	ABSOLUTE LUMEN OUTPUT:	540lm
	GLARE MECHANICAL CUT-OFF:	53°
	GLARE COMFORT CUT-OFF:	70°
COLOUR TEMP:	3000K	

ELECTRICAL	VOLTAGE REGION:	100 - 240V 50/60Hz
	IEC PROTECTION CLASS:	Class 2
	LIGHT SOURCE WATTAGE:	10W
	MOVEMENT WATTAGE:	4W
	LUMINAIRE CIRCUIT WATTAGE:	15W

PART NO.

DRX1.0017

PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 3000K 90+CRI LED 10W; Black; Movement using Handheld Remote; Dimming using DMX Control