


;

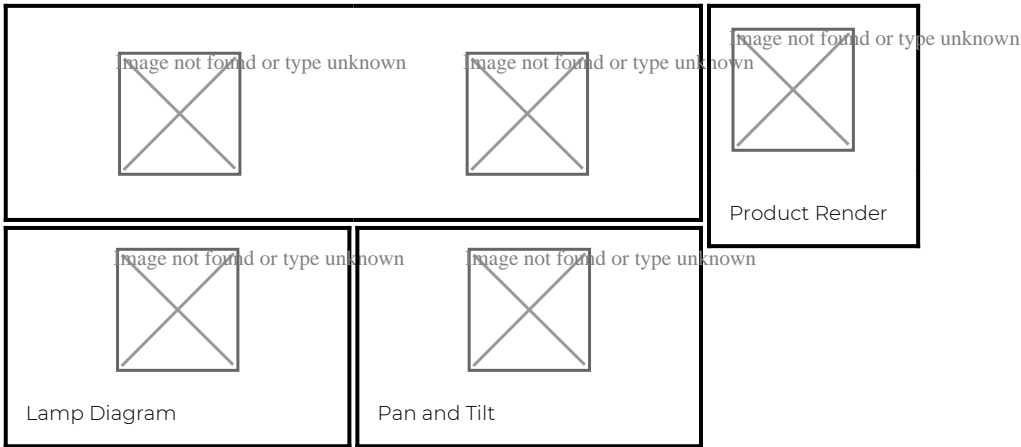

PHYSICAL

- WEIGHT:
- FINISH:
- MAX AMBIENT TEMPERATURE:
- CEILING CLEARANCE:
- CEILING CUT-OUT:
- CEILING THICKNESS:

SPECIFICATION

CONTROL

- MOVEMENT TYPE:
- DIMMING OPTION:

PART NO. 

PRODUCT SUMMARY

DAT-

## Photometry



### Cone Diagram

**MOVEMENT TYPE:**  
**PAN MOVEMENT RANGE:**  
**TILT MOVEMENT RANGE:**  
**PAN MOVEMENT RESOLUTION:**  
**TILT MOVEMENT RESOLUTION:**  
**PAN SPEED OF MOVEMENT:**  
**TILT SPEED OF MOVEMENT:**

**ELECTRICAL**

VOLTAGE REGION:  
IEC PROTECTION CLASS:  
LIGHT SOURCE WATTAGE:  
MOVEMENT WATTAGE:  
LUMINAIRE CIRCUIT WATTAGE:

**LIGHTING**

**LIGHT SOURCE:**

**MIN. DISTANCE FROM TARGET:**

**MODULE LUMEN OUTPUT:**

**ABSOLUTE LUMEN OUTPUT:**

**GLARE MECHANICAL CUT-OFF:**

**GLARE COMFORT CUT-OFF:**

**COLOUR TEMP:**

PART NO.

## PRODUCT SUMMARY

DAT-