




DRX1; 1-Circuit Track LED 4° Optic 15W

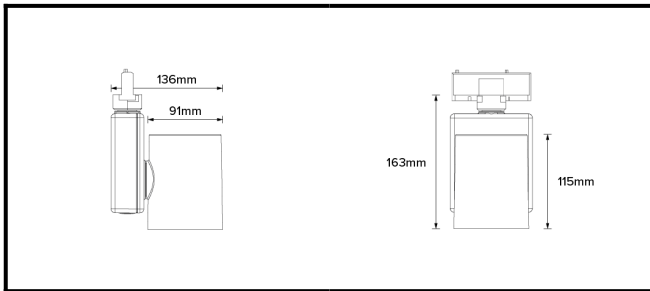

PHYSICAL	MOUNTING:	1-Circuit Track
	WEIGHT:	1.2 kg
	FINISH:	Black RAL9005
	MAX AMBIENT TEMPERATURE:	40°C
	CEILING CLEARANCE:	N/A
	CEILING CUT-OUT:	N/A
	CEILING THICKNESS:	N/A
CONTROL	MOVEMENT TYPE:	Handheld Remote
	DIMMING OPTION:	DALI Dimming


SPECIFICATION DRX1 3000K LED (10W for light source) compact spotlight for 1-Circuit Eutrac with 4° optic. Manufactured from A380 aluminium and glass-filled polycarbonate. Finished in black (RAL 9005). Voltage is 100-240V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 165° movement through the pan axis and +/- 110° through the tilt axis, at a resolution of less than 1° in either axis. Movement is controlled using a handheld remote, and dimming is controlled using external DALI dimming. Recording and recall of luminaire position (pan and tilt) with handheld remote controller as standard.

PART NO.

DRX1.0019
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 3000K 90+CRI LED 10W; Black; Movement using Handheld Remote; Dimming Using External DALI Control

DRX1; 1-Circuit Track LED 4° Optic 15W



Photometry

15W 4°		LED
1m	0.07m	56646 lx
2m	0.14m	14161 lx
3m	0.21m	6294 lx
4m	0.28m	3540 lx
5m	0.35m	2266 lx

Cone Diagram

MOVEMENT	MOVEMENT TYPE:	Handheld Remote
	PAN MOVEMENT RANGE:	±165°
	TILT MOVEMENT RANGE:	±110°
	PAN MOVEMENT RESOLUTION:	<1°
	TILT MOVEMENT RESOLUTION:	<1°
	PAN SPEED OF MOVEMENT:	24°/s
	TILT SPEED OF MOVEMENT:	22°/s

LIGHTING	LIGHT SOURCE:	LED
	MIN. DISTANCE FROM TARGET:	N/A
	MODULE LUMEN OUTPUT:	594lm
	ABSOLUTE LUMEN OUTPUT:	540lm
	GLARE MECHANICAL CUT-OFF:	53°
	GLARE COMFORT CUT-OFF:	70°
COLOUR TEMP:	3000K	

ELECTRICAL	VOLTAGE REGION:	100 - 240V 50/60Hz
	IEC PROTECTION CLASS:	Class 2
	LIGHT SOURCE WATTAGE:	10W
	MOVEMENT WATTAGE:	4W
	LUMINAIRE CIRCUIT WATTAGE:	15W

PART NO.

DRX1.0019
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 3000K 90+CRI LED 10W; Black; Movement using Handheld Remote; Dimming Using External DALI Control