




DRX1; 1-Circuit Track LED 4° Optic 15W

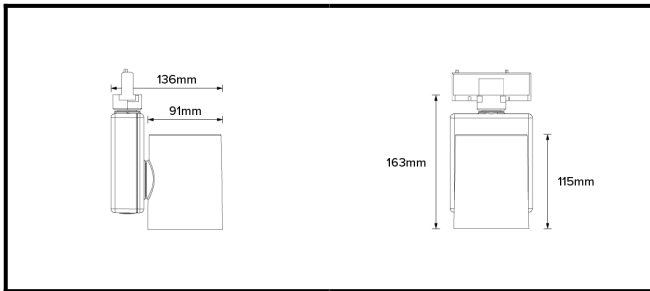

| | | |
|-----------------|---------------------------------|--|
| PHYSICAL | CONSTRUCTION MATERIALS: | A380 Aluminium, Glass-filled Polycarbonate |
| | MOUNTING: | 1-Circuit Track |
| | WEIGHT: | 1.2 kg |
| | FINISH: | White RAL9010 |
| | MAX AMBIENT TEMPERATURE: | 40°C |
| | CEILING CLEARANCE: | N/A |
| | CEILING CUT-OUT: | N/A |
| | CEILING THICKNESS: | N/A |


| | | |
|----------------|------------------------|----------|
| CONTROL | MOVEMENT TYPE: | Handheld |
| | DIMMING OPTION: | DMX |

SPECIFICATION DRX1 4000K LED (10W for light source) compact spotlight for 1-Circuit Eutrac with 4° optic. Manufactured from A380 aluminium and glass-filled polycarbonate. Finished in white (RAL 9010). Voltage is 100-240V 50/60HZ. Luminaire has high-performance colour rendering of 80+ CRI. Luminaire can be rotated, with +/- 165° movement through the pan axis and +/- 110° through the tilt axis, at a resolution of less than 1° in either axis. Movement is controlled using a handheld remote, and dimming is controlled using DMX. Recording and recalling of scenes as standard.


PART NO. **DRX1.0022**

| | |
|------------------------|---|
| PRODUCT SUMMARY | DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 4000K 80+CRI LED 10W; White; Movement using Handheld Remote; Dimming using DMX Control |
|------------------------|---|

DRX1; 1-Circuit Track LED 4° Optic 15W



Photometry



Cone Diagram

| | | |
|-----------------|----------------------------------|----------|
| MOVEMENT | MOVEMENT TYPE: | Handheld |
| | PAN MOVEMENT RANGE: | ±165° |
| | TILT MOVEMENT RANGE: | ±110° |
| | PAN MOVEMENT RESOLUTION: | <1° |
| | TILT MOVEMENT RESOLUTION: | <1° |
| | PAN SPEED OF MOVEMENT: | 24°/s |
| | TILT SPEED OF MOVEMENT: | 22°/s |

| | | |
|---------------------|-----------------------------------|-------|
| LIGHTING | LIGHT SOURCE: | LED |
| | MIN. DISTANCE FROM TARGET: | N/A |
| | MODULE LUMEN OUTPUT: | 594LM |
| | ABSOLUTE LUMEN OUTPUT: | 540LM |
| | GLARE MECHANICAL CUT-OFF: | 25° |
| | GLARE COMFORT CUT-OFF: | 50° |
| COLOUR TEMP: | 4000K | |

| | | |
|-------------------|-----------------------------------|------------------|
| ELECTRICAL | VOLTAGE REGION: | 100-240V 50/60Hz |
| | IEC PROTECTION CLASS: | Class 2 |
| | LIGHT SOURCE WATTAGE: | 10W |
| | MOVEMENT WATTAGE: | 4W |
| | LUMINAIRE CIRCUIT WATTAGE: | 15W |

PART NO. **DRX1.0022**

PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 4000K 80+CRI LED 10W; White; Movement using Handheld Remote; Dimming using DMX Control