


## DMX 6-Way Splitter

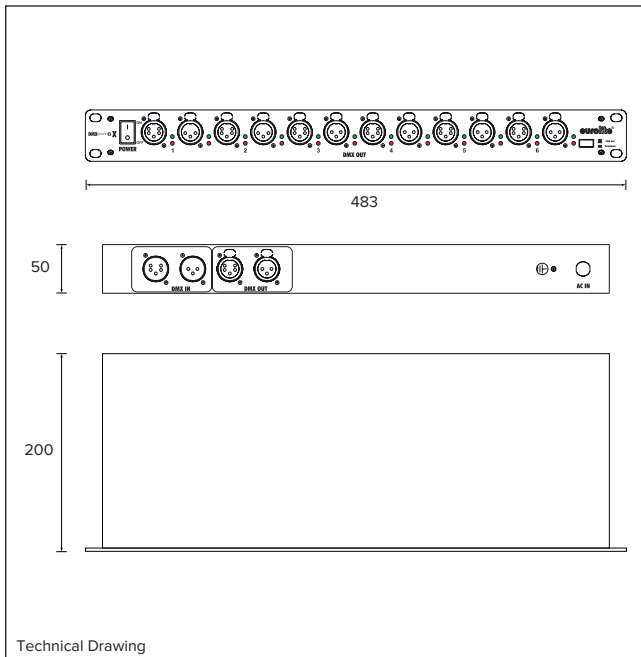

**SPECIFICATION**

**DESCRIPTION**

The DMX 6-Way Splitter is required for iDirect installations, splitting the DMX signal from the RCL Mediator Box (12314) for the RCL Luminaires in the installation. Each output is electrically isolated to ensure the Mediator is protected from cabling fault

**DATA**

<b>INPUT</b>	220-240Vac; 50Hz
<b>POWER CONSUMPTION</b>	35W
<b>DIMENSIONS</b>	483(L) x 200(W) x 50(H)
<b>WEIGHT</b>	3.5kg
<b>DMX INPUT</b>	Contains 1 x 3-pin or 5-pin XLR-connector input.
<b>DMX OUTPUT</b>	3-pin or 5-pin XLR-connector. Contains 6 outputs. Every DMX output features an independent driver, data and data-indicator.
<b>DMX CONNECTION</b>	The DMX Splitter must be connected directly to the RCL Mediator Box (12314). You can connect up to 30 DMX fixtures to every DMX circuit. The total number of fixtures shall not exceed 126. Activate the termination switch on the final splitter.

**ORDER NO. 12147**